
## TEST the system before the installation ON a bench for proper setup and operation

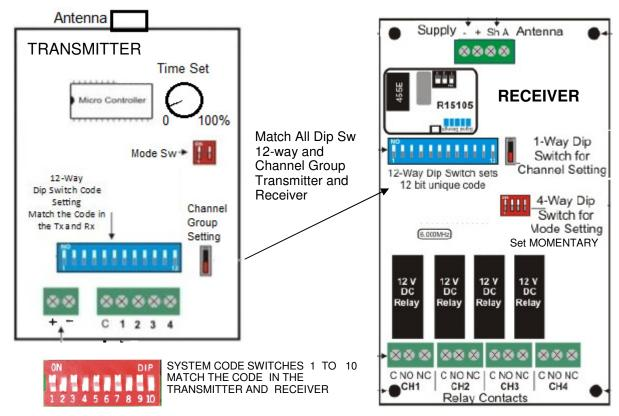

NOTE: Transmitter and receiver antennas shall be mounted facing the same vertical position, (same polarity pattern ) even when there is no line of sight.

## Never operate the transmitter or receiver without the antenna.


Separate the transmitter and receiver ANTENNAS at least 6 feet (2 meter) apart Make sure the 12 code DIP switch from the transmitter matches the receiver

- 1 Connect the Transmitter & Receiver to a power source
- 2 In the TRANSMITTER terminals
- (-) & (Ch1) Close momentary INPUT Ch1

At the RECEIVER the Signal Strength level \*\*\*Will light up, To confirm communication Relay energizes. Check contact status with a meter

3 Same procedure for each channel

Relay Contact is SPDT N/O-N/C Rated 5 Amp, maximum 250V



915400 REV 17 migro.com